


Elektroakustik

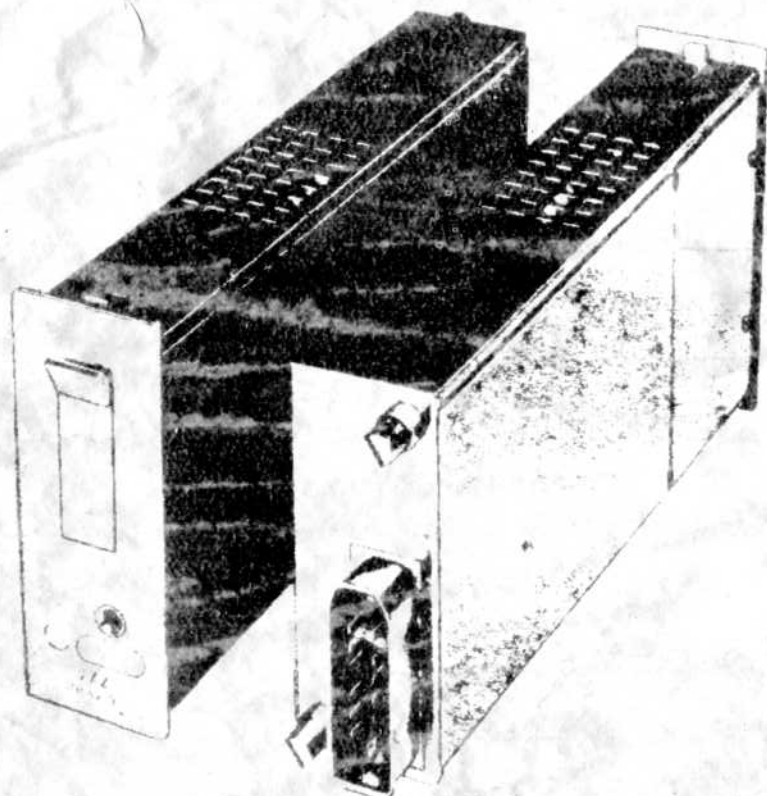

STUDIOVERSTÄRKER V 72

PREAMPLIFIER V 72 ENCASED

PREAMPLIFIER V 72 ENCASED

The studio preamplifier V 72 is a self-contained unit. In spite of its small size it has excellent electric characteristics. It is equipped with its own mains operated power supply. The two-stage high fidelity preamplifier has a gain of 34 dB at extremely low distortion. It may be used as microphone preamplifier, as line amplifier, and even as an isolation amplifier, in which case a suitable voltage divider has to be provided.

For mounting of studio preamplifiers V 72 the shelf assembly S 67 is available, the height of which is corresponding to 4 standard units (4 x 34 mm). It can hold 1 to 10 units V 72. The backside of the V 72 unit is equipped with a 12-pole plug strip type T 2008. The opposite contacts - jack strip type T 2009 are mounted at the shelf assembly S 67.

Shelf assembly type S 67 for self-contained studio units, equipped with jack strips T 2009, for holding 10 units size 1 (front panel 134 x 47 mm). Instead of two units size 1 one unit size 2 may be put in.

A blocking scheme avoids faulty setting of other encased units of the same size (please see specifications V 72).



Dimensions

Width	520 mm (20 1/2")
Height	134 mm (4 standard units of 34 mm) (5 1/4")
Depth	300 mm (11 3/4")
Weight	8 kg (17 1/2 lb.)

Februar 1959

Kassettenverstärker V 72
mit Netzteil

A IV, 28-1

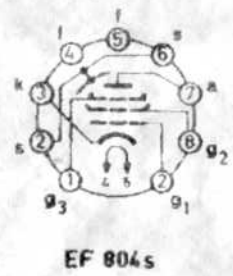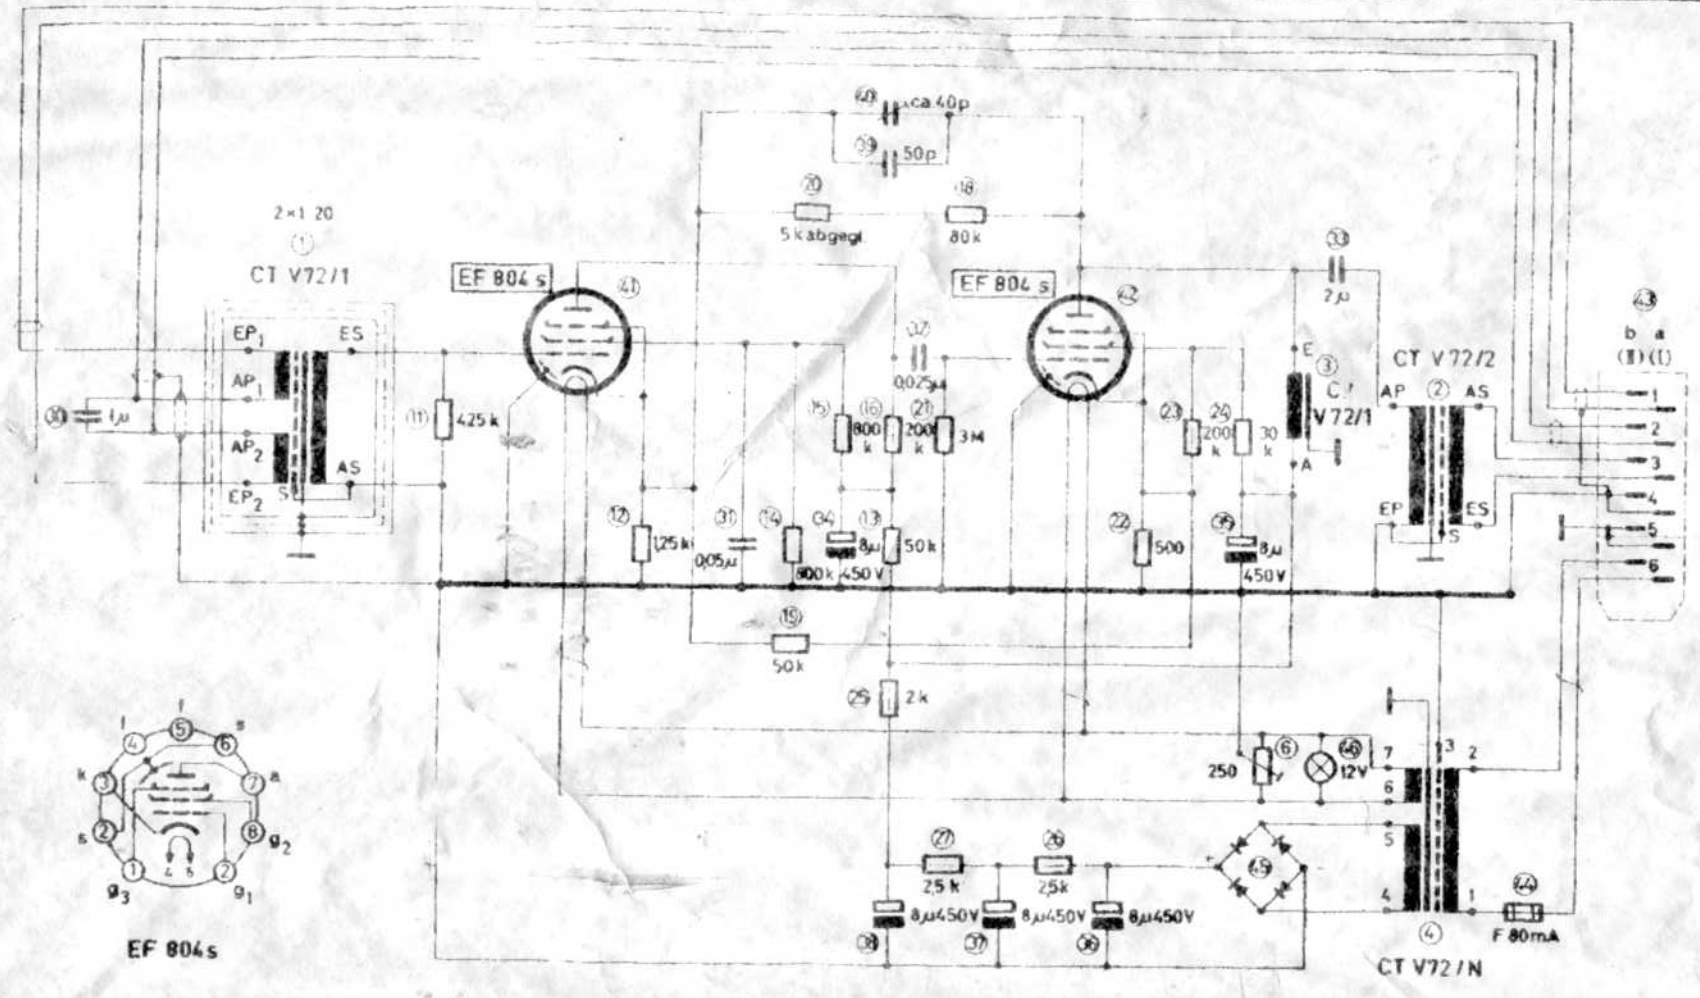

- ① Eingangübertrager CT V 72/1 - Bv 191 Ausg. 2
- ② Ausgangübertrager CT V 72/2 - Bv 192
- ③ Anodendrossel CK V 72/1 - Bv 193
- ④ Netztrafo CT V 72/N - Bv 196
- ⑤ Drahtdrehwiderstand 250 A1 DIN 41469
- ⑥ Trimmer in abgeglichenem Zustand ca. 40pF
- ⑦ Feinsicherung F 0,08/500 DINE 41574
- ⑧ kurzer Stecklampe 12V ML 26 Rafi-L. Nr. 822
- ⑨ Selen-Gleichrichter 300 B 60 AEG Socket M

